


Z E U S

H Y D R A T E C H L T D

Global Suppliers of Premium Hydraulic Components

Official UK Distributor for Nachi Hydraulic Components

T: +44(0)1172 130042. E: sales@zeushydratech.com. W: zeushydratech.com



PVS Series Variable Volume Piston Pumps

8.0 to 45.0cm³/rev
21MPa

- ❖ Design No. 30 is applied on PVS-0B to make the pump more compact and lighter, and reduce noise.
- ❖ Production of PVS-3B has been discontinued. Use PZS-3B.
- ❖ Pressure adjustment 3 type has been added to PVS-1B-22 and PVS-2B-45. (Design No. 20 is applied only on PVS-2B-45*3.)

Features

Energy-saving Type with Drastically Reduced Loss

A NACHI-proprietary semi-circular barrel swash plate that receives pressure on its surface ensures a stable discharge volume at all times. This eliminates excess

discharge volume, and enables the effective use of power corresponding to the load cycle.

This "energy-saving type" conserves energy, reduces power loss, and helps to reduce hydraulic costs.

Silent Type That Demonstrates Its Power Quietly

Proprietary low-noise mechanisms are incorporated on the shoe, swash plate, valve plate, and other locations to ensure silent operation. In particular, a semi-circular barrel swash plate stabilizes operation characteristics to ensure silent operation.

Specifications

Model No.	Volume cm ³ /rev	Discharge volume at no-load l/min				Pressure adjustment range MPa {kgf/cm ² }	Permitted peak pressure MPa {kgf/cm ² }	Rotating speed min ⁻¹		Mass kg
		1000min ⁻¹	1200min ⁻¹	1500min ⁻¹	1800min ⁻¹			Min.	Max.	
PVS-0B-8*0-30	8.0 (3.0 to 8.0)	8.0	9.6	12.0	14.4	2 to 3.5 {20.4 to 35.7} 2 to 7 {20.4 to 71.4} 3 to 14 {30.6 to 143 } 3 to 21 {30.6 to 214 }	25 {255}	500	2000	7.7
PVS-1B-16*0-(*)-12	16.5 (5.0 to 16.5)	16.5	19.8	24.7	29.7	2 to 3.5 {20.4 to 35.7} 2 to 7 {20.4 to 71.4} 3 to 14 {30.6 to 143 } 3 to 21 {30.6 to 214 }	25 {255}	500	2000	10.5
PVS-1B-22*0-(*)-12	22.0 (7.0 to 22.0)	22.0	26.4	33.0	39.6	2 to 3.5 {20.4 to 35.7} 2 to 7 {20.4 to 71.4} 3 to 14 {30.6 to 143 } 3 to 21 {30.6 to 214 }	25 {255}	500	2000	10.5
PVS-2B-35*0-(*)-12	35.0 (8.0 to 35.0)	35.0	42.0	52.5	63.0	2 to 3.5 {20.4 to 35.7} 2 to 7 {20.4 to 71.4} 3 to 14 {30.6 to 143 } 3 to 21 {30.6 to 214 }	25 {255}	500	2000	21
PVS-2B-45*0-(*)-12	45.0 (11.0 to 45.0)	45.0	54.0	67.5	81.0	2 to 3.5 {20.4 to 35.7} 2 to 7 {20.4 to 71.4} 3 to 14 {30.6 to 143 } 3 to 21 {30.6 to 214 }	25 {255}	500	2000	21

Note) Direction of rotation is clockwise when viewed from the shaft end.

- Handling
- Cautions during Pump Installation and Piping

- ① Use flexible couplings for connecting the pump shaft to the drive shaft, and prevent a radial or thrust load from being applied on the pump shaft.
- ② For centering of the pump shaft, limit the eccentricity between the drive shaft and hydraulic pump shaft to 0.05 mm, and keep the angle error within 1°.
- ③ Set the length of insertion between coupling and hydraulic pump shafts so that it is within at least 2/3 or more of the coupling width.
- ④ Use a sufficiently rigid pump mounting base.
- ⑤ Set the pressure on the pump suction side to -0.03 MPa or more (suction port flow velocity within 2 m/sec).
- ⑥ Raise part of the drain piping to above the topmost part of the pump body, and insert the return section of the drain

piping into the hydraulic fluid. Also, observe the values in the following table to limit the drain back pressure to 0.1 MPa.

Model No. Item	PVS-0B PVS-1B	PVS-2B
Pipe joint size	3/8" or more	1/2" or more
Pipe I.D.	φ7.6 dia or more	φ12 dia or more
Pipe length	1m or less	1m or less

- ⑦ Mount the pump so the pump shaft is oriented horizontally.

● Management of Hydraulic Operating Fluid

- ① Use good-quality hydraulic operating fluid, and use within a kinematic viscosity range of 20 to 200 mm²/sec during operation. Use an R&O type and anti-wear hydraulic fluid of ISO-VG32 to 68. The optimum kinematic viscosity during operation is 20 to 50 mm²/sec.

② The operating temperature range is 5 to 60°C. When the oil temperature at startup is 5°C or less, warm up the hydraulic pump by low-pressure, low-operation speed operation until the oil temperature reaches 5°C.

③ Provide a suction strainer with a filtering grade of about 100μm (150 mesh). Be sure to provide a return line filter of grade 20μm or less on the return line to the tank. (When the hydraulic pump is used at a high pressure of 14 MPa or more, we recommend providing a filter of 10μm or less.

④ Manage the hydraulic operating fluid so that contamination is maintained at class NAS10 or lower.

⑤ Use hydraulic operating fluid within an operating ambient temperature of 0 to 60°C.

(continued on following page)

● Inverter Drive Precautions

- ① Set the revolution speed within the range of the pump specification revolution speed.
 ② Changing the revolution speed may also affect the pump performance curves. Before using the inverter, check if the pressure and motor load factor are within the range of use.

● Cautions at Startup

- ① Before you start pump operation, fill the pump body with clean hydraulic fluid via the lubrication port.

Model No.	Injection amount cm ³
PVS-0B-8	220
PVS-1B-16, 22	300
PVS-2B-35, 45	650

- ② An unload is required when the motor is started under condition $\lambda-\Delta$. Consult your agent regarding the circuit.

③ Make sure that the pump operates in the direction of rotation the same as that indicated by the arrow on the pump body.


④ Air entering to the pump or pipes may cause noise or vibration. At startup, set the pump discharge side to a no-load state, and operate the pump in the inching mode to release any air in the pump or pipes.

⑤ Provide an air bleed valve in circuits where it is difficult to release air at startup. (See "IP Pumps" on page C-13.)

● How to Set Pressure and Discharge Volume

For the factory default pump discharge volume is set to "maximum" and discharge pressure is set to "minimum". Change the discharge volume and discharge pressure settings according to your particular operating conditions.

[Pressure adjustment]
 Turning the pressure adjusting screw CW increases the pressure.



[Discharge volume adjustment]
 Turning the flow rate adjusting screw CW decreases the discharge volume.

Note

- For details regarding the relationship between flow rate adjustment length ℓ and pump capacity q , see the tables provided in the installation dimension drawings for each of the pumps.
- Firmly tighten the lock nuts after you have finished adjustments.

[Note]

- Variable control mechanism

Standard type

N* : Pressure compensation type (manual mode)

Option type

P* : Pressure compensation type (remote control mode)

N*Q* : 2-pressure, 2-flow rate control

R^AS^④ : Solenoid cutoff control

W^AS^④ : 2-pressure control

RQ^AS^④ : 2-pressure, 2-flow rate control w/ solenoid cutoff

C^AS^④ : 2-cutoff control

- * : Pressure adjustment range

0 : 2 to 3.5MPa {20.4 to 35.7kgf/cm²}
 1 : 2 to 7MPa {20.4 to 71.4kgf/cm²}
 2 : 3 to 14MPa {30.6 to 143kgf/cm²}
 3 : 3 to 21MPa {30.6 to 214kgf/cm²}

- ④ : Applicable to solenoid specifications A, S

A^④: SA-G01

S^④: SS-G01

1 : 100V 50/60Hz

2 : 200V 50/60Hz

3 : DC12V

4 : DC24V

Explanation of model No.

PVS - 1 B - 16 N 2 - (*) - 12

Design No.30: PVS-0*
 12: PVS-1*, PVS-2*
 20: PVS-2*-45N3 only

Auxiliary symbol None: Side port type
 Z: Axial port type (PVS-1*, PVS-2*)

Pressure adjustment range [Note] Reference
 Variable control mechanism [Note] Reference


Max. pump capacity (cm³/rev)
 Nominal 8, 16, 22, 35, 45

Mounting method
 B: Mounting flange type A: Mounting foot type


Pump size
 0, 1, 2

PVS series variable piston pump


[Example 1]
 N*: Pressure compensation type (manual mode)
 PVS-1B-16N2




[Example 2]
 P*: Pressure compensation type (remote control mode)
 PVS-1B-16P2




[Example 3]
 N*Q*: 2-pressure, 2-flow rate control
 PVS-1B-16N2Q1




[Example 4]
 R'S*: Solenoid cutoff control
 PVS-1B-16R2S2
 Solenoid specifications
 200V 50/60Hz
 SS-G01




[Example 5]
 W'S*: 2-pressure control
 PVS-1B-16W2S1
 Solenoid specifications
 100V 50/60Hz
 SS-G01



[Example 6]
 RQ'S*: 2-pressure, 2-flow rate control w/ solenoid cutoff
 PVS-1B-16RQ2S1
 Solenoid specifications
 100V 50/60Hz
 SS-G01






[Example 7]
 C'S*: 2-cutoff control
 PVS-1B-16C2S2
 Solenoid specifications
 200V 50/60Hz
 SS-G01





















- NQ, RS, WS, RQS and CS types are not available for the PVS-0B-8.
- NQ, RQS and CS types are not available for the PVS-1B-16-Z and PVS-2B-35-Z.

Variable Control Mechanisms

Standard type

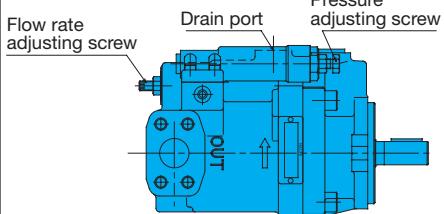Symbol	External View	Characteristics	Hydraulic Circuit	Explanation
N				<p>Pressure compensation type (manual system) When the discharge pressure reaches the preset pressure set by the pressure compensator, the discharge rate is automatically reduced to hold the pressure at the set pressure (full cutoff pressure).</p>

Option type

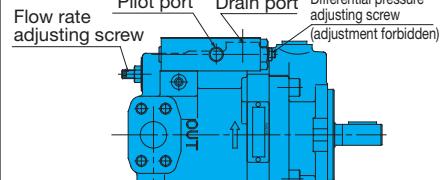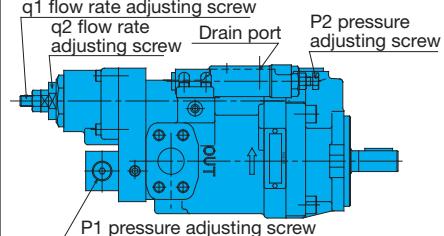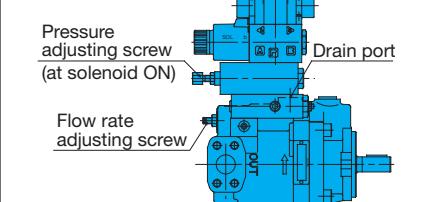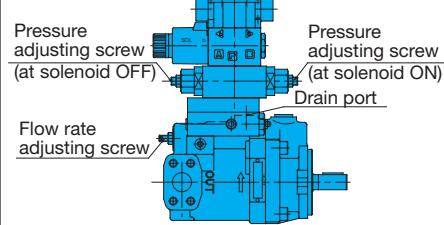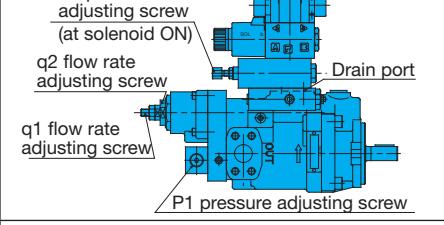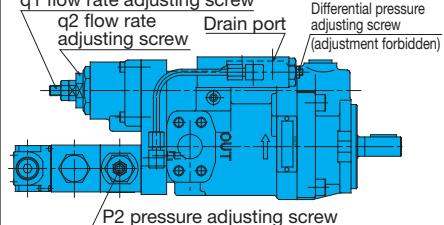P				<p>Pressure compensation type (remote control mode) This mode demonstrates the same characteristics as the manual mode. The full cutoff pressure can be adjusted by external pilot pressure. The discharge rate can be adjusted manually. Note 2)</p>
NQ				<p>2-pressure, 2-flow rate control type The discharge volume changes in two stages by the pump's built-in sequence valve. This allows conventional high/ low pressure control to be performed on a single pump unit, and save energy in the hydraulic circuit.</p>
RS (RA)				<p>Solenoid cutoff control type A solenoid valve for unload is integrated into the pressure compensation type to minimize energy loss when pump output is not required. Only a slight amount of heat is generated.</p>
WS (WA)				<p>2-pressure control type Two pressure compensation types can be obtained by switching the solenoid valve ON/OFF. Two types of pressure control are possible with the actuator set to a constant speed.</p>
RQS (RQA)				<p>2-pressure, 2-flow rate control type w/ solenoid cutoff The discharge volume can be changed in two stages by the sequencer valve and solenoid valve for unload mounted on the pump, and unloading is possible when pressure oil is not required.</p>
CS (CA)				<p>2-cutoff control type Two types of pressure - flow rate characteristics can be obtained by the solenoid valve and cylinder mounted on the pump.</p>

Note 1) Many other variable control mechanisms are also available in addition to those in the above table. Please consult your agent for details.



Note 2) We recommend ZR-T02-*5895* as the remote control valve. For details, consult your agent. The pipe volume up to the remote control valve should be less than 150cm³.

Pressure Compensation Type

Manual mode: standard type


PVS-0B-8N*-30

Installation Dimension Drawing

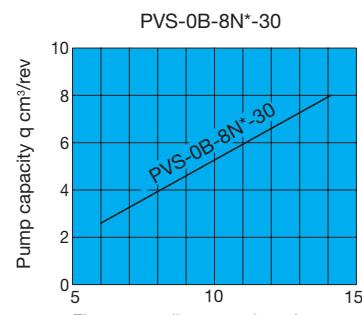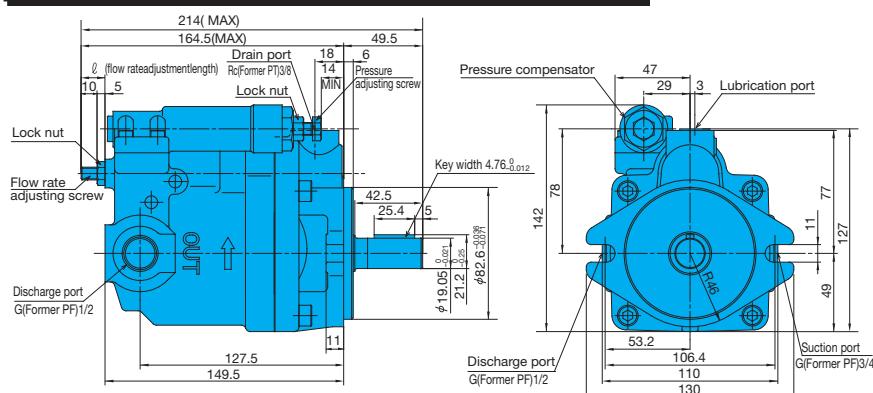

Set a flow rate adjustment length within the above range. Oil will leak if the pump is operated below the adjustment range lower limit.

Cross-sectional Drawing

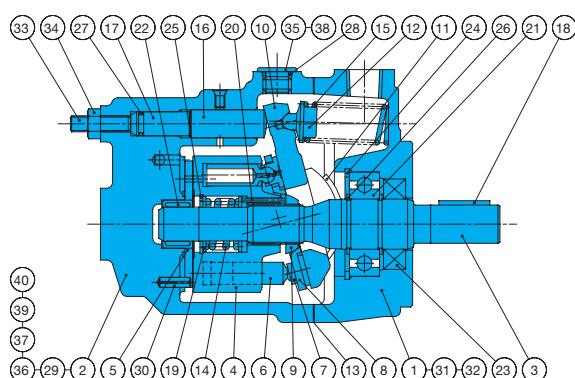

Part No.	Part Name	Part No.	Part Name	Part No.	Part Name
1	Body	15	Spring S	29	Parallel pin
2	Case	16	Control piston	30	Spring pin
3	Shaft	17	Guide pin	31	Hexagon socket head bolt
4	Cylinder barrel	18	Parallel key	32	Cross-recessed countersunk head screw
5	Valve plate	19	Retainer	33	Hexagon socket set screw
6	Piston	20	Needle	34	Hexagon nut
7	Shoe	21	Ball bearing	35	Hexagon plug
8	Shoe holder	22	Needle bearing	36	Metal plug
9	Barrel holder	23	Oil seal	37	Nameplate
10	Swash plate	24	Snap ring	38	Lubrication port plate
11	Thrust bush	25	Snap ring	39	CAUTION plate
12	Spring holder	26	Snap ring	40	Rivet
13	Gasket	27	O-ring		
14	Spring C	28	O-ring		


List of Sealing Parts (Kit Model Number PSCS-100000)

Part No.	Part Name	Q'ty	PVS-0B-8	
			Size	Remarks
*	Packing	1	PSC46-100000	3 Bond
23	Oil seal	1	TCV-254511-V	N.O.K
27	O-ring	1	NBR-90 P9	JIS B 2401
28	O-ring	1	NBR-90 P11	JIS B 2401


Parts marked by an asterisk *** are not available on the market.
Consult your agent.

Performance Curves


General Performance

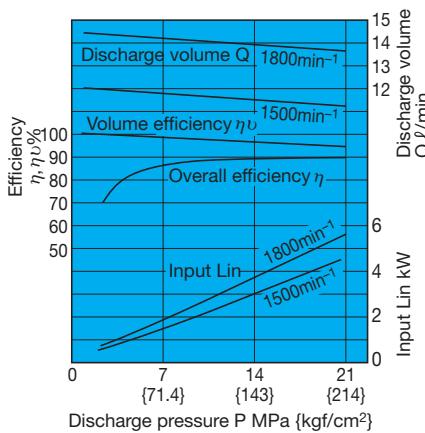


Pressure - Discharge Volume Characteristics

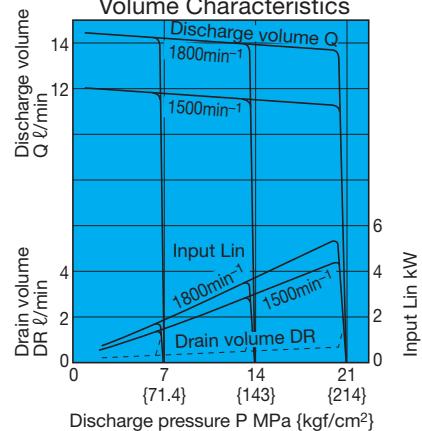


Axial Input

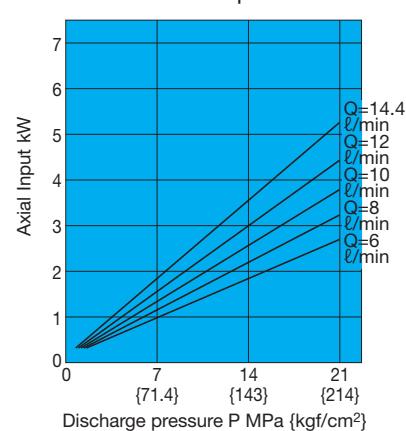

Axial Input at Full Cutoff

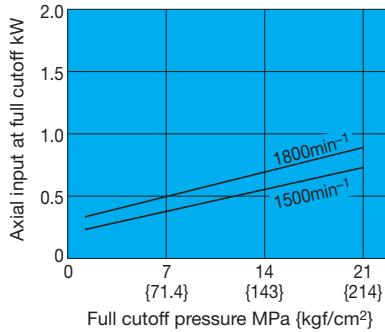


Noise Characteristics

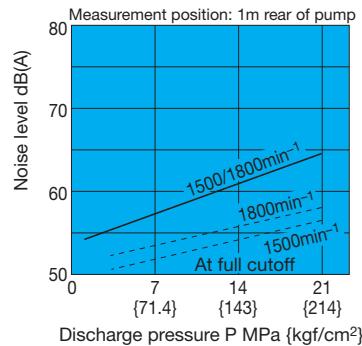


Installation Dimension Drawings


PVS-1B-¹⁶₂₂N*(Z)-12
(side port type)

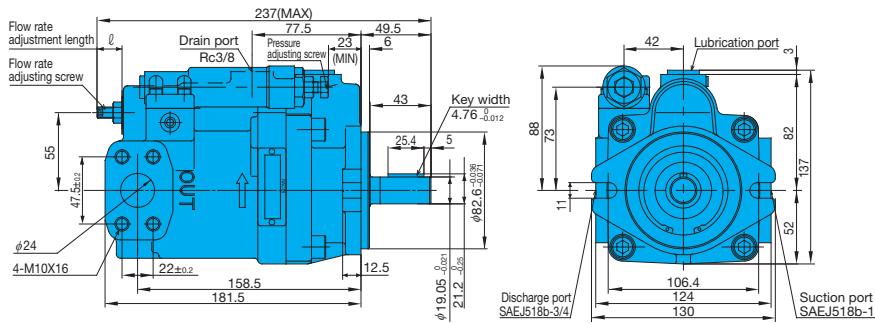

(axial port type)

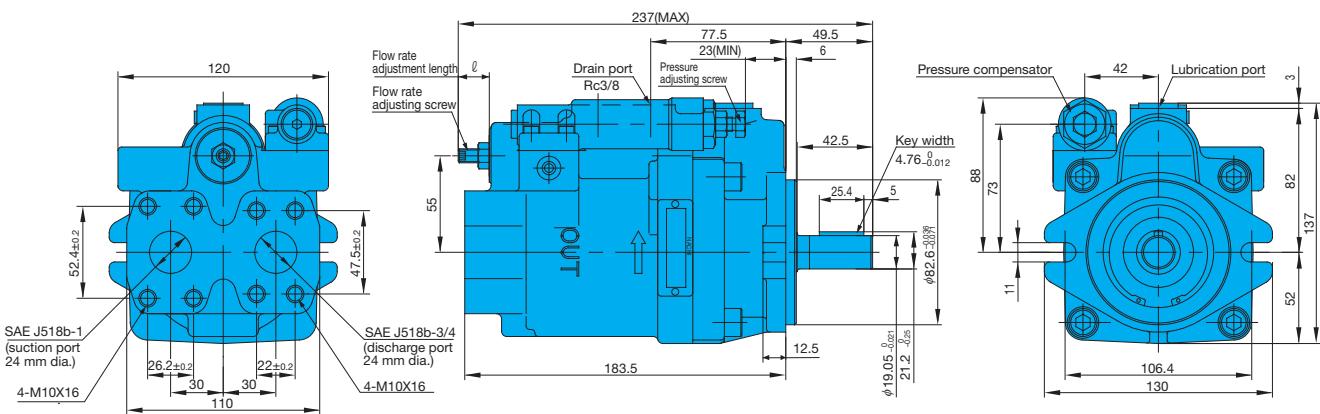

Cross-sectional Drawing

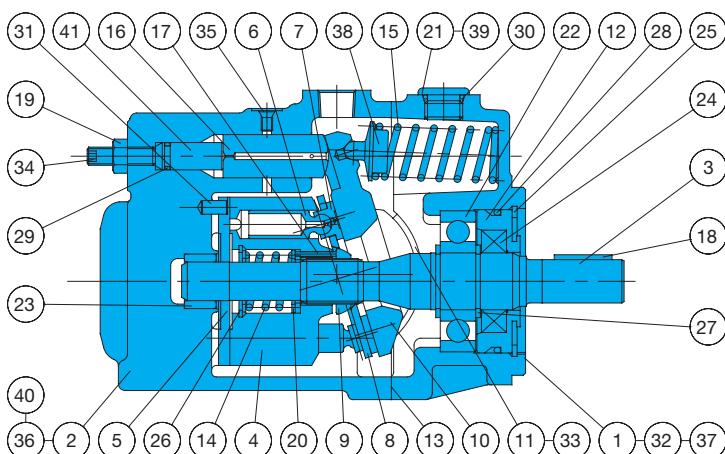


Part No.	Part Name	Part No.	Part Name
1	Body	22	Ball bearing
2	Case	23	Needle bearing
3	Shaft	24	Oil seal
4	Cylinder barrel	25	Snap ring
5	Valve plate	26	Snap ring
6	Piston	27	Snap ring
7	Shoe	28	O-ring
8	Shoe holder	29	O-ring
9	Barrel holder	30	O-ring
10	Swash plate	31	Pin
11	Thrust bush	32	Hexagon socket head bolt
12	Seal holder	33	Cross-recessed countersunk head screw
13	Gasket	34	Hexagon socket set screw
14	Spring C	35	Metal plug
15	Spring S	36	Nameplate
16	Control piston	37	CAUTION plate
17	Needle	38	Spring holder
18	Key	39	Lubrication port plate
19	Nut	40	Rivet
20	Retainer	41	Guide pin
21	Plug		

List of Sealing Parts (Kit Model Number PSS-101000-2A)

Part No.	Part Name	Q'ty	Size	Remarks
13	Gasket	1	PSC46-101000	Nihon Gasket
24	Oil seal	1	TCN-254511-V	N.O.K
28	O-ring	1	NBR-90 G55	JIS B 2401
29	O-ring	1	NBR-90 P9	JIS B 2401
30	O-ring	1	NBR-90 P14	JIS B 2401

Parts marked by an asterisk ***are not available on the market.
Consult your agent.


Relationship between flow rate adjustment length (l) and pump capacity (q)

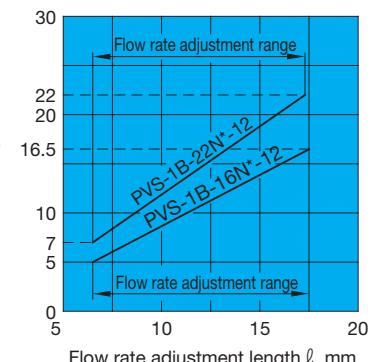

Set a flow rate adjustment length within the above range. Oil will leak if the pump is operated below the adjustment range lower limit.


Performance Curves

PVS-1B-16N*(Z)-12

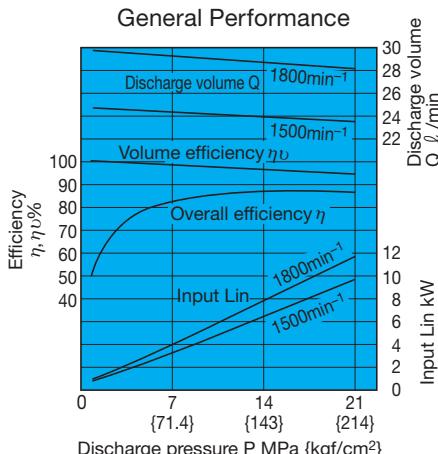


Typical characteristics at hydraulic fluid kinematic viscosity of 32 mm²/s


Pressure - Discharge Volume Characteristics

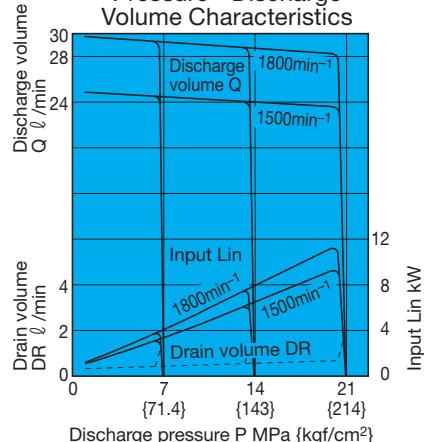


Axial Input

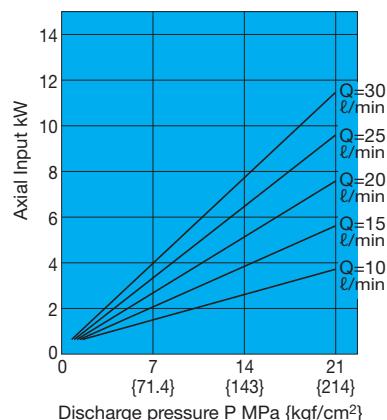

Axial Input at Full Cutoff

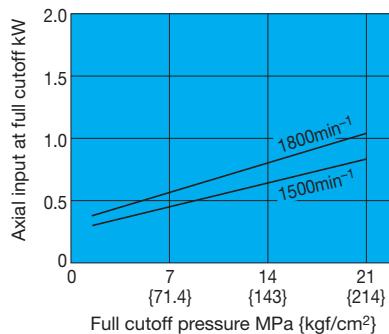


Noise Characteristics

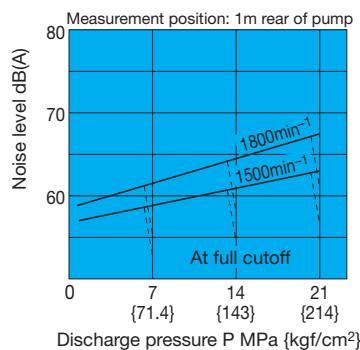


Performance Curves

PVS-1B-22N*(Z)-12

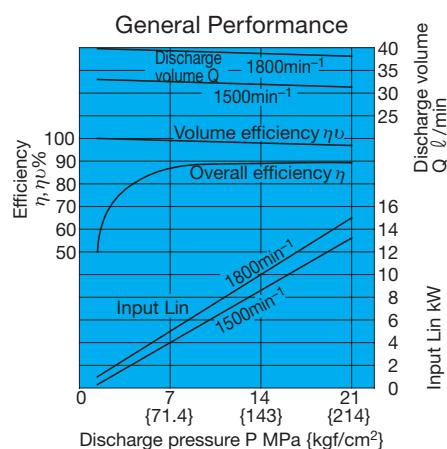


Typical characteristics at hydraulic operating fluid kinematic viscosity of 32 mm²/s


Pressure - Flow Rate Characteristics

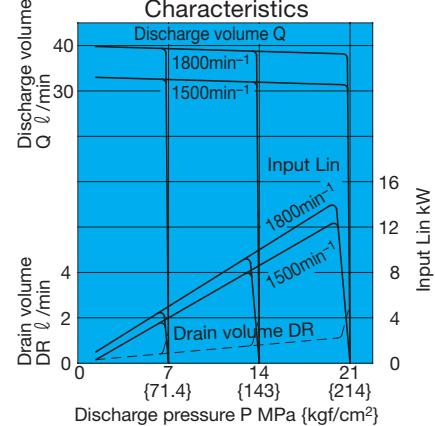


Axial Input

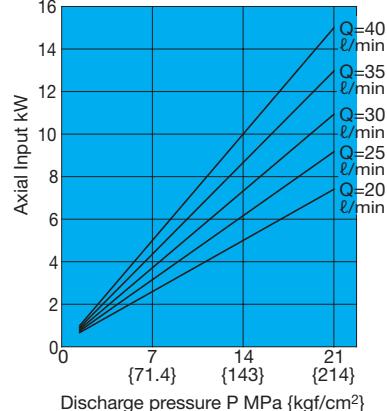

Axial Input at Full Cutoff

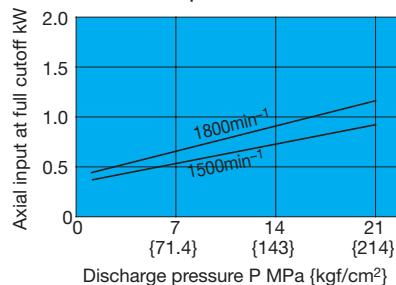


Noise Characteristics

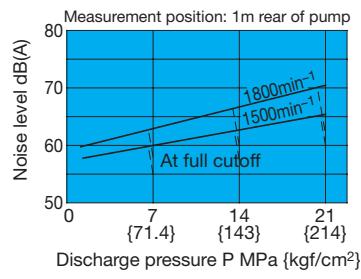


Installation Dimension Drawings


PVS-2B-³⁵₄₅N*(Z)-12(20)
(side port type)

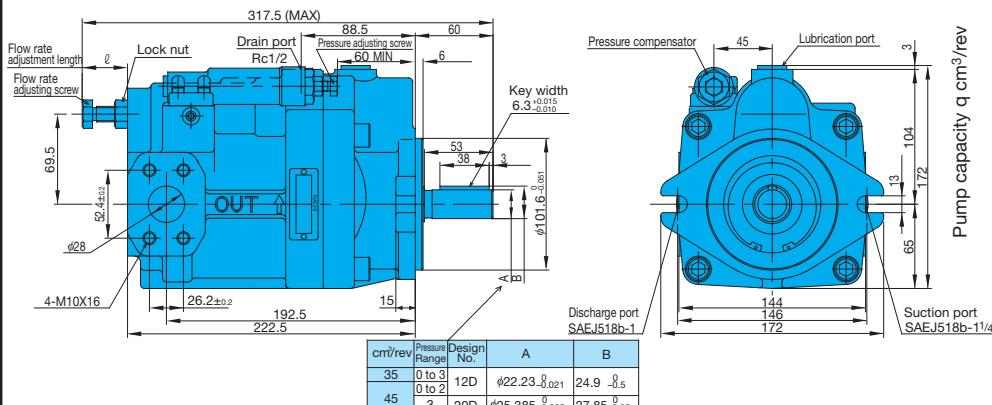

Relationship between flow rate adjustment length (ℓ) and pump capacity (q)

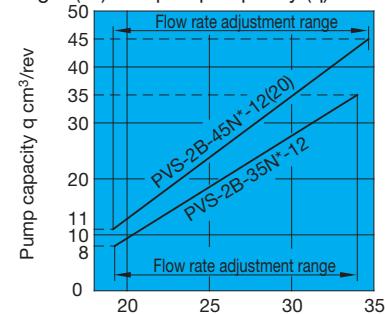


(axial port type)

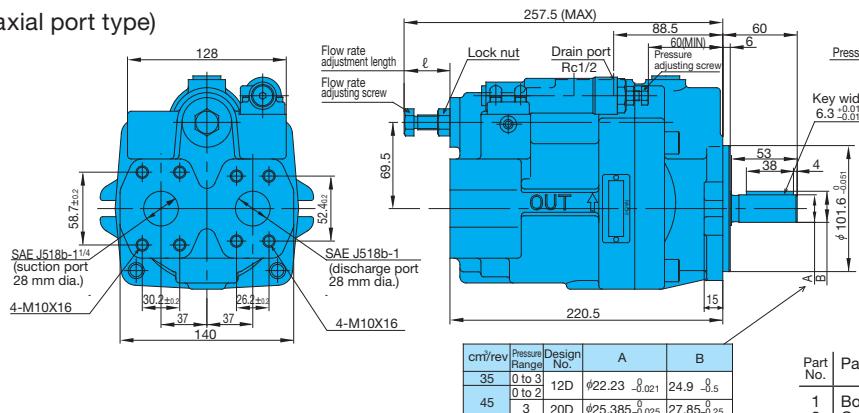


Cross-sectional Drawings

PVS-2B-³⁵₄₅N*(Z)-12

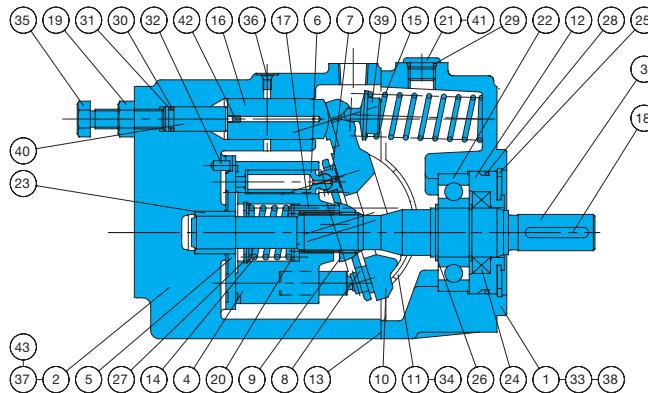

PVS-2B-45N3-(Z)-20

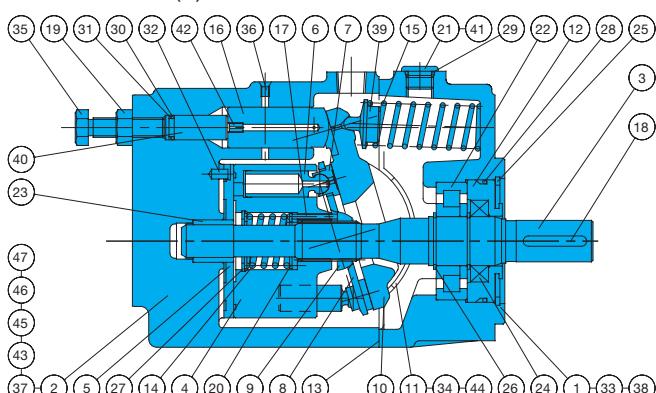

Part No.	Part Name	Part No.	Part Name	Part No.	Part Name
1	Body	16	Control piston	31	Backup ring
2	Case	17	Needle	32	Pin
3	Shaft	18	Key	33	Hexagon socket head bolt
4	Cylinder barrel	19	Nut	34	Cross-recessed countersunk head screw
5	Valve plate	20	Retainer	35	Flow rate adjusting screw
6	Piston	21	Plug	36	Metal plug
7	Shoe	22	Ball bearing	37	Nameplate
8	Shoe holder	23	Needle bearing	38	CAUTION plate
9	Barrel holder	24	Oil seal	39	Spring holder
10	Swash plate	25	Snap ring	40	Guide
11	Thrust bush	26	Snap ring	41	Lubrication port plate
12	Seal holder	27	Snap ring	42	Orifice
13	Gasket	28	O-ring	43	Rivet
14	Spring C	29	O-ring	44	Orifice
15	Spring S	30	O-ring	45	Pin
				46	O-ring
				47	Plug

List of Sealing Parts (Kit Model Number PSS-102000-2A)

Part No.	Part Name	Q'ty	PVS-2B-35/45	
			Size	Remarks
13	Gasket	1	PS46-102000-0A	Nihon Gasket
24	Oil seal	1	TCN-305011-V	N.O.K.
28	O-ring	1	1B-G70	JIS B 2401
29	O-ring	1	1B-P14	JIS B 2401
30	O-ring	1	1B-P11	JIS B 2401
31	Backup ring	1	T2-P11	JIS B 2407

Parts marked by an asterisk *** are not available on the market. Consult your agent.

Part No.	Part Name	Part No.	Part Name	Part No.	Part Name
1	Body	17	Needle	33	Hexagon socket head bolt
2	Case	18	Key	34	Cross-recessed countersunk head screw
3	Shaft	19	Nut	35	Flow rate adjusting screw
4	Cylinder barrel	20	Retainer	36	Metal plug
5	Valve plate	21	Plug	37	Nameplate
6	Piston	22	Roller bearing	38	CAUTION plate
7	Shoe	23	Needle bearing	39	Spring holder
8	Shoe holder	24	Oil seal	40	Guide
9	Barrel holder	25	Snap ring	41	Lubrication port plate
10	Swash plate	26	Snap ring	42	Orifice
11	Thrust bush	27	Snap ring	43	Rivet
12	Seal holder	28	O-ring	44	Orifice
13	Gasket	29	O-ring	45	Pin
14	Spring C	30	O-ring	46	O-ring
15	Spring S	31	Backup ring	47	Plug
16	Control piston	32	Pin		


List of Sealing Parts (Kit Model Number PSBS-102220)

Part No.	Part Name	Q'ty	PVS-2B-45N3	
			Size	Remarks
13	Gasket	1	PS46-102000-0A	Nihon Gasket
24	Oil seal	1	TCN-305011-V	N.O.K.
28	O-ring	1	1B-G70	JIS B 2401
29	O-ring	1	1B-P14	JIS B 2401
30	O-ring	1	1B-P11	JIS B 2401
46	O-ring	2	1B-P5	JIS B 2401
31	Backup ring	1	T2-P11	JIS B 2407

Parts marked by an asterisk *** are not available on the market. Consult your agent.


Performance Curves

PVS-2B-35N*(Z)-12

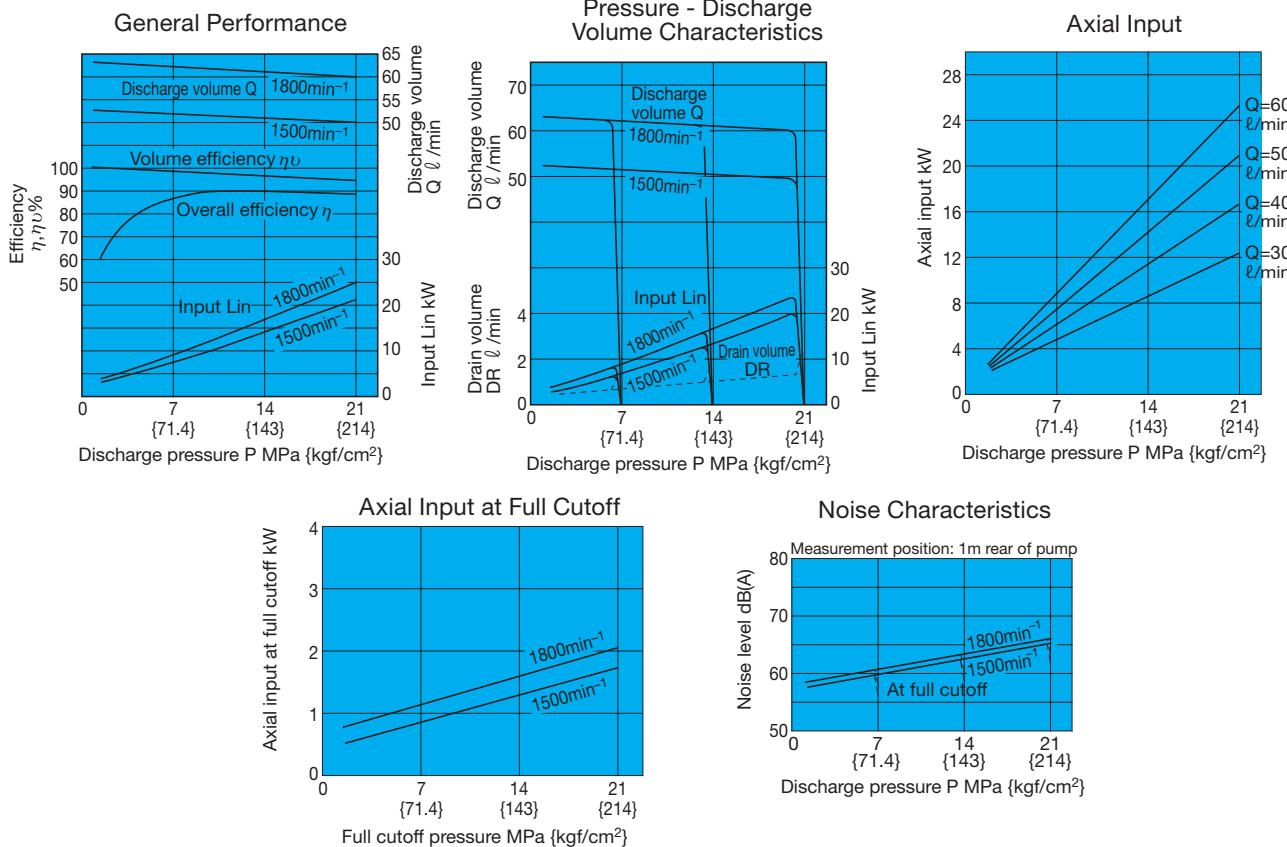


Performance Curves

PVS-2B-45N*(Z)-12(20)

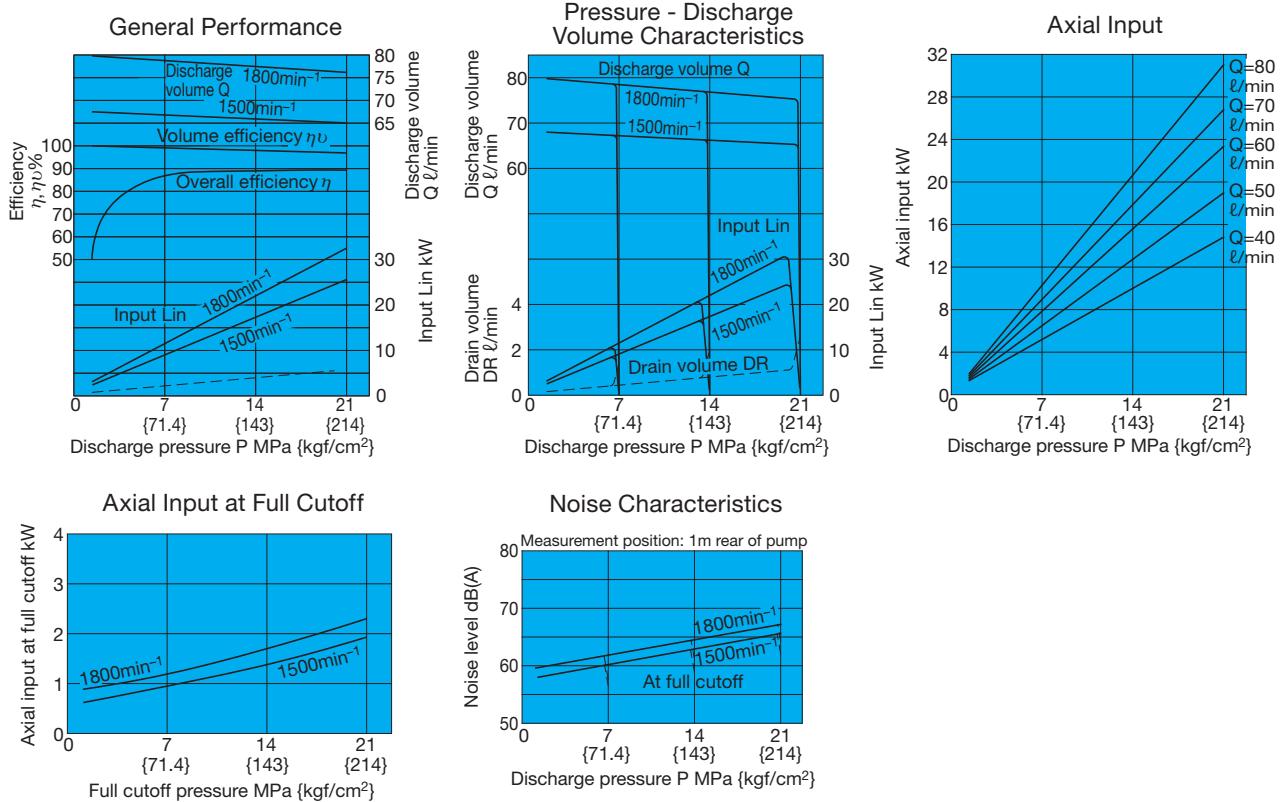


Response Performance

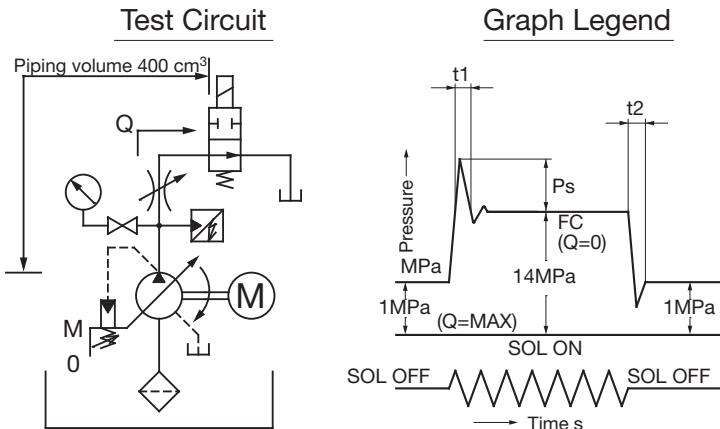

Model No.	Response Time (s)		Surge Pressure MPa{kgf/cm ² }
	t ₁	t ₂	
PVS-0B-8	0.03 to 0.04	0.04 to 0.06	2 to 4{20.4 to 40.8}
PVS-1B-16	0.05 to 0.06	0.07 to 0.08	4 to 7{40.8 to 71.4}
PVS-1B-22	0.05 to 0.06	0.07 to 0.08	5 to 8{51 to 81.6}
PVS-2B-35	0.05 to 0.06	0.05 to 0.07	6 to 9{61.2 to 91.8}
PVS-2B-45	0.05 to 0.06	0.05 to 0.07	6 to 9{61.2 to 91.8}

Response performance changes according to pipe volume and size.
Use an anti-surge valve to prevent surge voltage.

Pressure Compensator

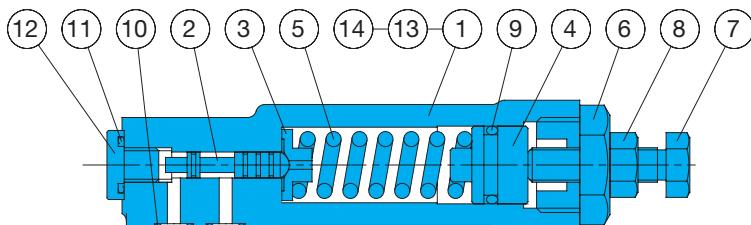

Part No.	Part Name	Part No.	Part Name
1	Body	8	Nut
2	Spool	9	O-ring
3	Holder	10	O-ring
4	Plunger	11	O-ring
5	Spring	12	Plug
6	Retainer	13	Plug
7	Pressure adjusting bolt	14	Mounting bolt

List of Sealing Parts

Part No.	Name	Q'ty	Size
			For 0B, 1B, 2B
9	O-ring	1	NBR-70-1 P14
10	O-ring	3	NBR-90 P6
11	O-ring	1	NBR-90 P10

Note) The materials and hardness of the O-ring conform with JIS B2401.

Pressure Compensation Type

(remote control mode)

Explanation of model No.: **PVS - 0 B - 8 P* - 30**

Design No.

30: PVS-0*

12: PVS-1*, PVS-2*

20: PVS-2*-45P3 only

Pressure adjustment range


0: 2- 3.5MPa {20.4- 35.7kgf/cm²}1: 2- 7MPa {20.4- 71.4kgf/cm²}2: 3-14MPa {30.6-143kgf/cm²}3: 3-21MPa {30.6-214kgf/cm²}

P: Pressure compensation type (remote control mode)

Max. pump capacity (cm³/rev)


Nominal 8, 16, 22, 35, 45

Pump size 0, 1, 2








Installation Dimension Drawings

PVS-0B-8P*-30

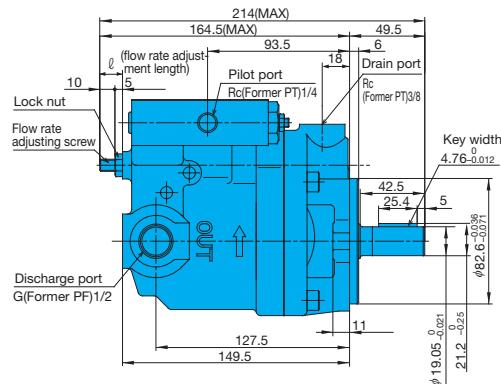



The ZR-T02-*-5895* is the recommended remote control valve. Provide piping to the remote control valve at a pipe volume of 150 cm³ or less.

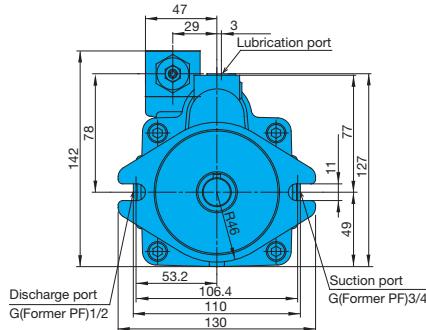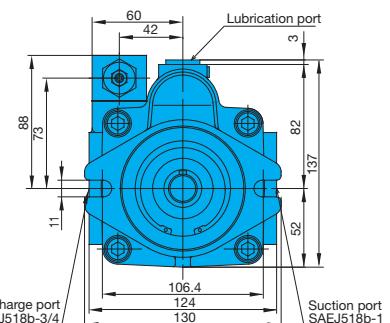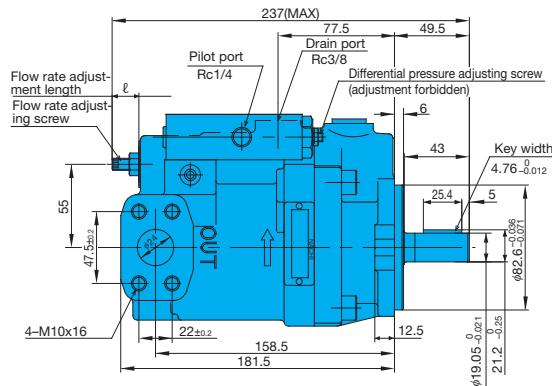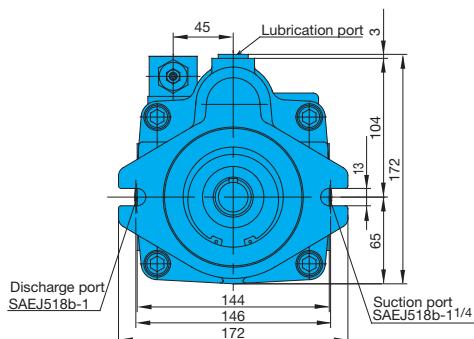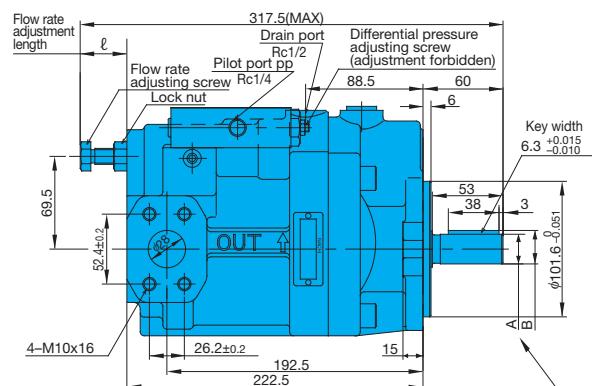PVS-1B-16 P*-12
22PVS-2B-35 P*-12(20)
45

cm ³ /rev	Pressure Range	Design No.	A	B
35	0 to 3 0 to 2	12D	φ22.23 ⁰ -0.021	24.9 ⁰ -0.5
45	3	20D	φ25.385 ⁰ -0.025	27.85 ⁰ -0.25


2-pressure, 2-flow Rate Control Type

Explanation of model No.: **PVS - 1 B - 16 N 3 Q 1 - 12**

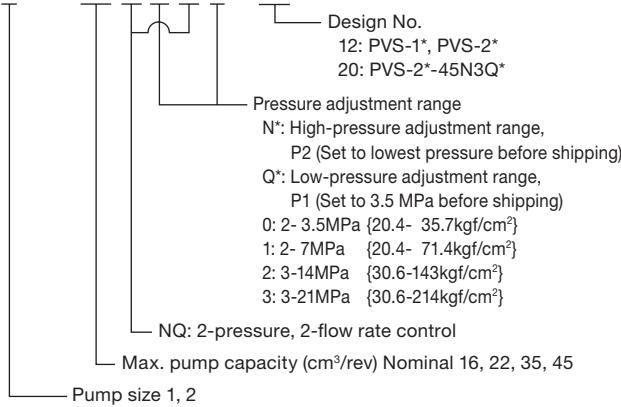


Installation Dimension Drawings

PVS-1B-¹⁶₂₂N*Q*-12

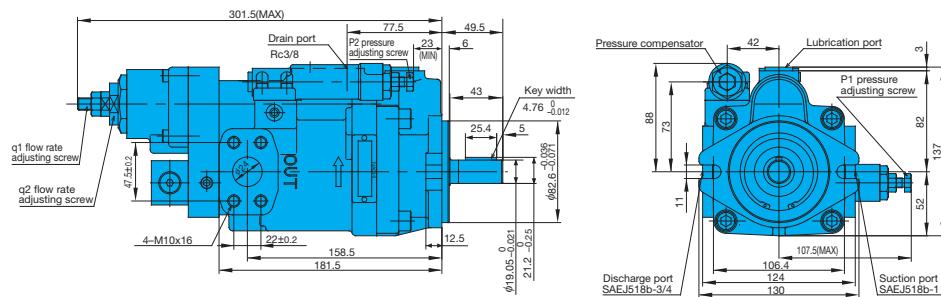


PVS-2B-³⁵₄₅N*Q*-12(20)

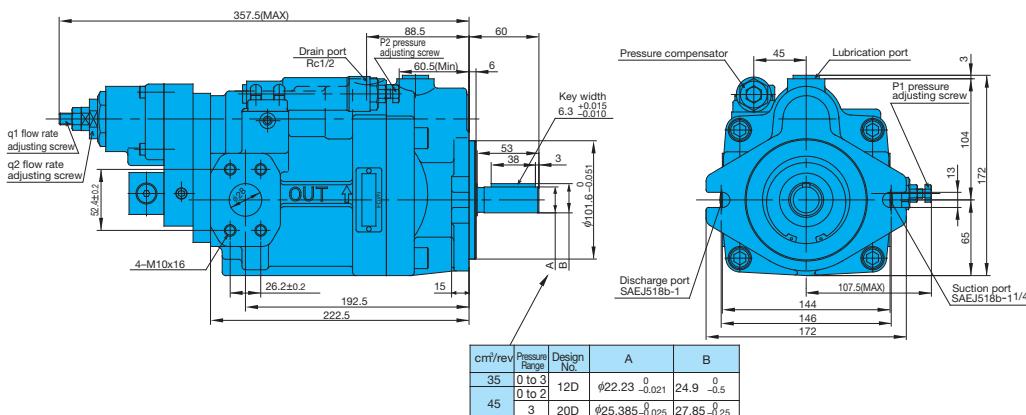

Pump Model No.	q ₁ Adjustment Range (cm ³ /rev)	Default q ₂ (Setting cm ³ /rev)
PVS-1B-16	2 to 10	3.3
PVS-1B-22	2 to 13	4.4
PVS-2B-35	2 to 19	7
PVS-2B-45	3 to 24	9



Note 1) The setting range of maximum pump capacity q₁ varies according to the setting of q₂.

Note 2) Overall efficiency at a low flow rate is lower than at the maximum flow rate. Pay attention to this when selecting the motor capacity for the drive.

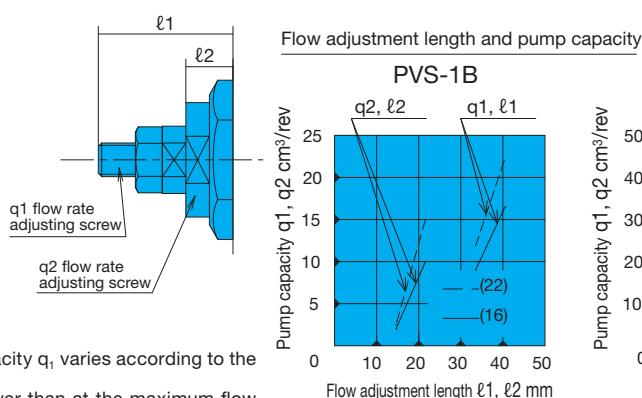


Solenoid Cutoff Control Type

Explanation of model No.: **PVS - 1 B - 16 R 2 S 1 - 12**

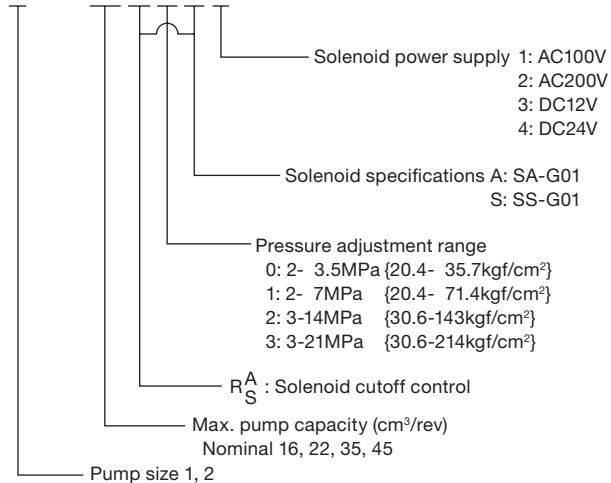


Installation Dimension Drawings

PVS-1B-¹⁶₂₂R^{*A*}_S-12

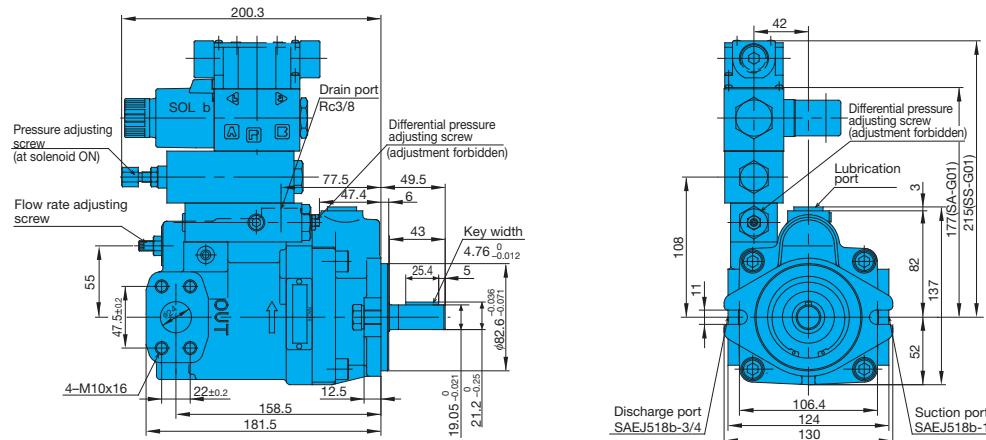



PVS-2B-³⁵₄₅R^{*A*}_S-12(20)

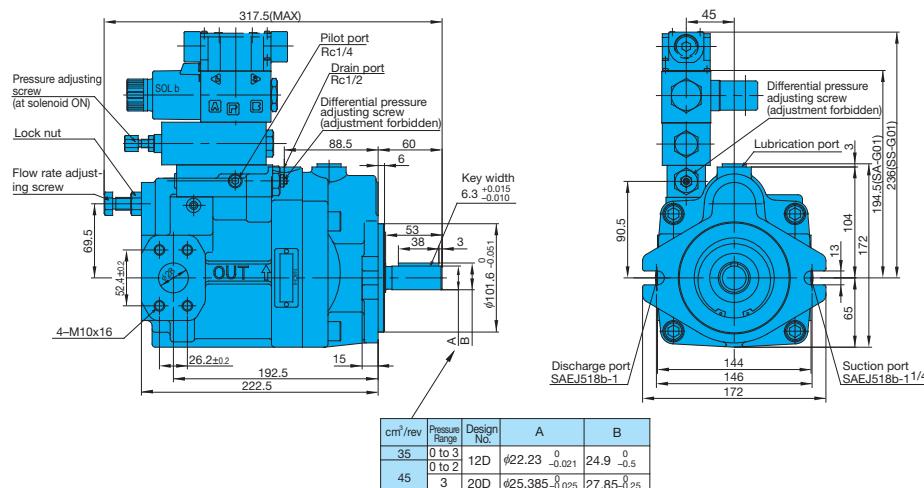

■ The coil surface temperature increases if this pump is kept continuously energized.
Do not touch the surface of the coil directly with your hands.



2-pressure Control Type

Explanation of model No.: **PVS - 1 B - 16 W 2 S 1 - 12**


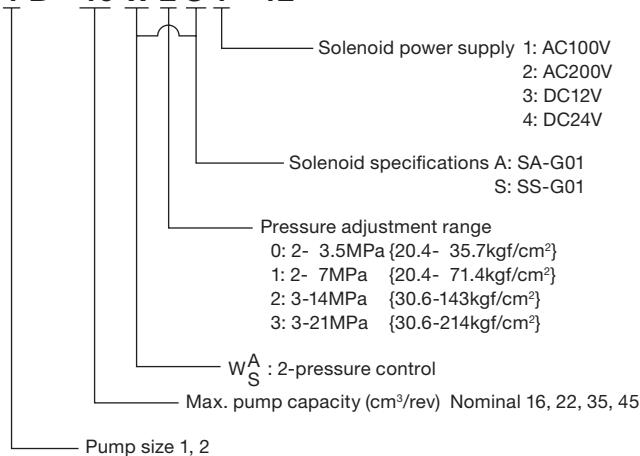


Installation Dimension Drawings

PVS-1B-¹⁶₂₂W^{A*}_S-12

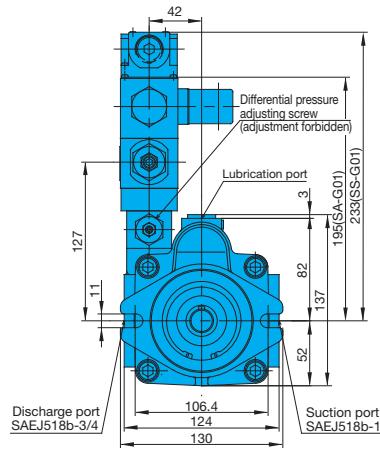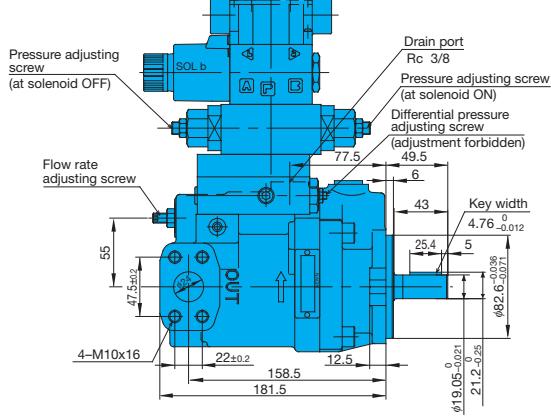



PVS-2B-³⁵₄₅W^{A*}_S-12(20)

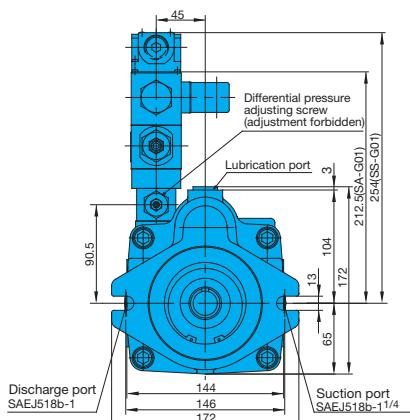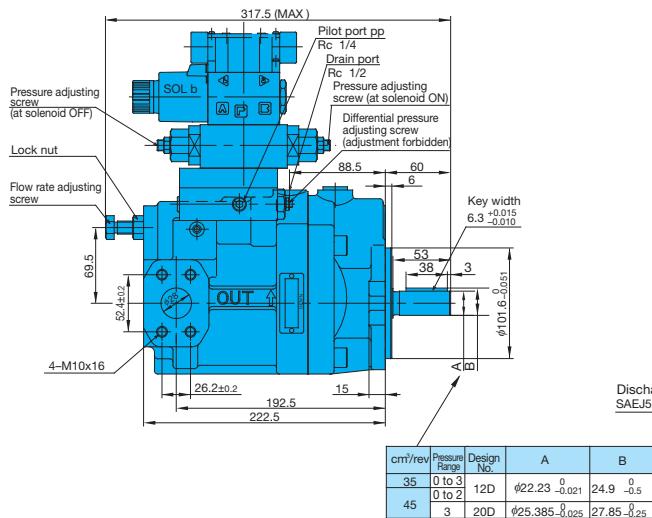

- The coil surface temperature increases if this pump is kept continuously energized.
Do not touch the surface of the coil directly with your hands.


2-pressure, 2-flow rate Control Type w/ Solenoid Cutoff

Explanation of model No.: **PVS - 1 B - 16 RQ 2 S 1 - 12**

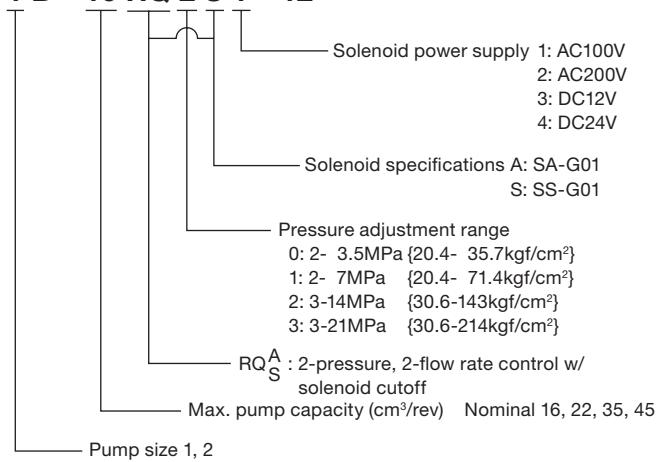


Installation Dimension Drawings

PVS-1B-¹⁶₂₂ RQ^A_S-12

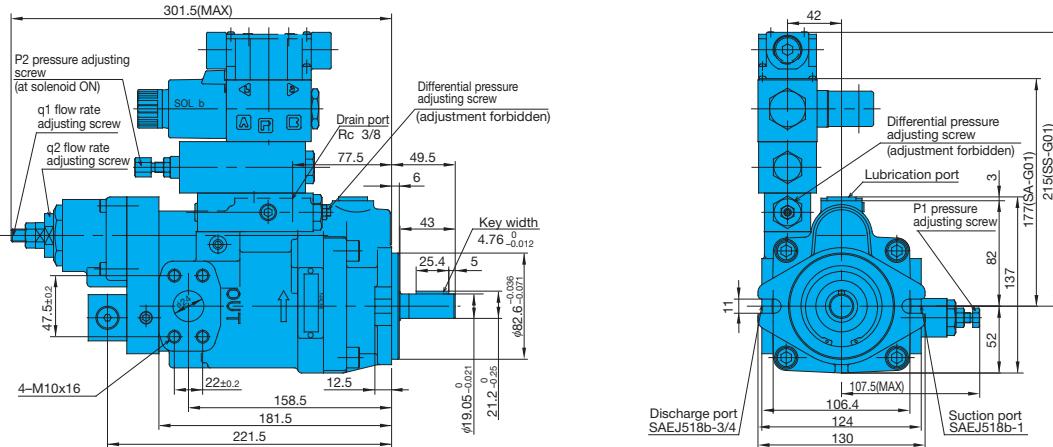



PVS-2B-³⁵₄₅ RQ^A_S-12(20)

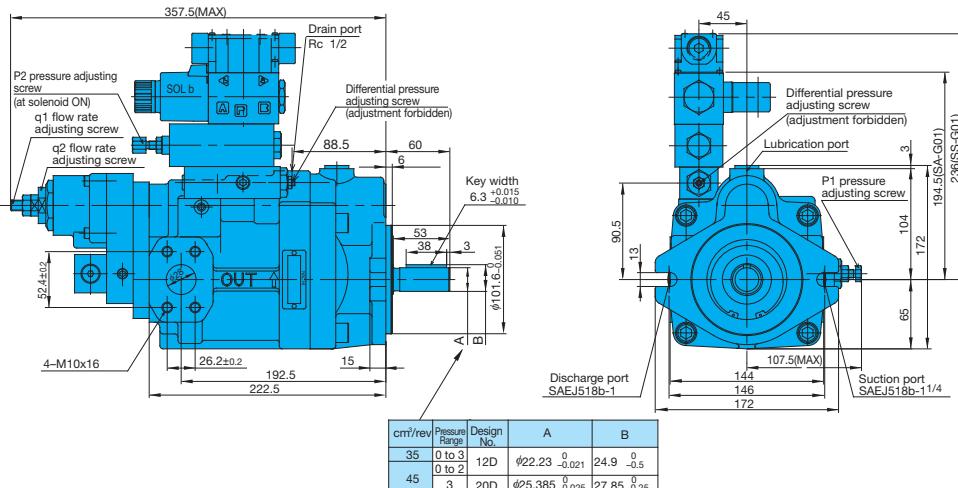

- The coil surface temperature increases if this pump is kept continuously energized.
Do not touch the surface of the coil directly with your hands.



2-cutoff Control Type

Explanation of model No.: PVS – 1 B – 16 C 2 S 1 – 12


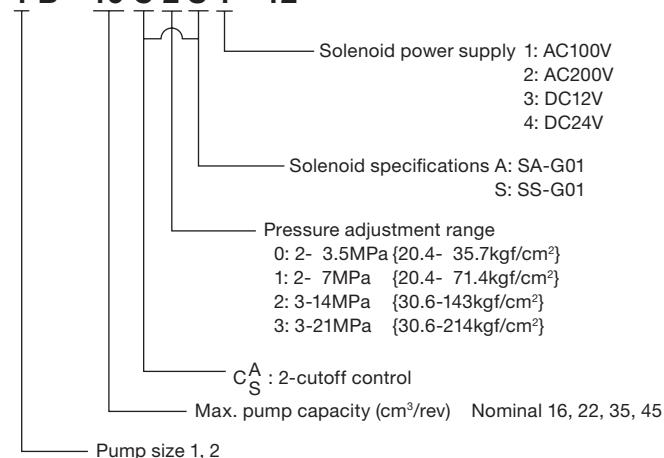


Installation Dimension Drawings

PVS-1B- $^{16}_{22}\text{C}^*\text{A}^*_{\text{S}}\text{-12}$

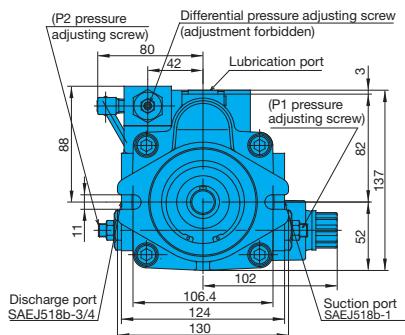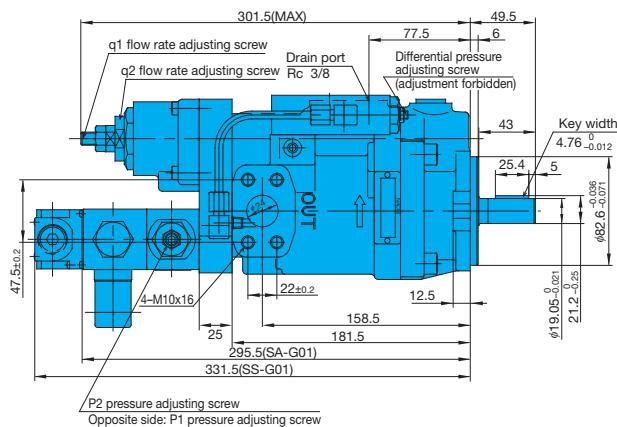


PVS-2B- $\frac{35}{45}$ C^{*}A^{*}-12(20)

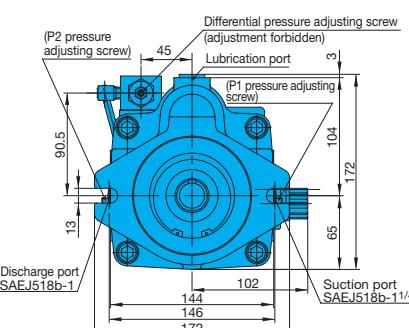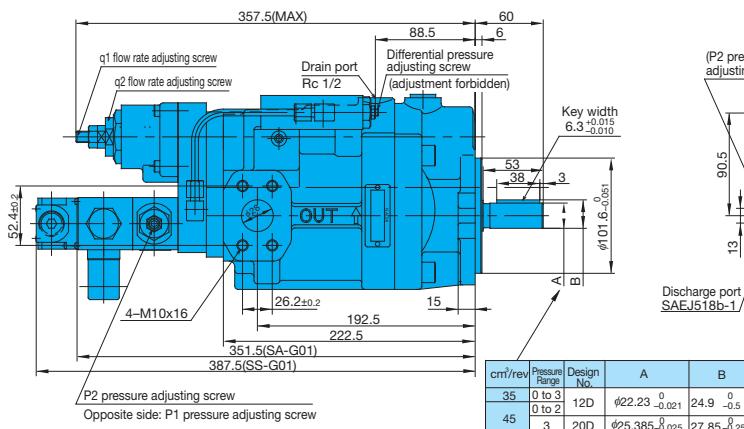

- The coil surface temperature increases if this pump is kept continuously energized.
Do not touch the surface of the coil directly with your hands.

Foot Mounting Kit

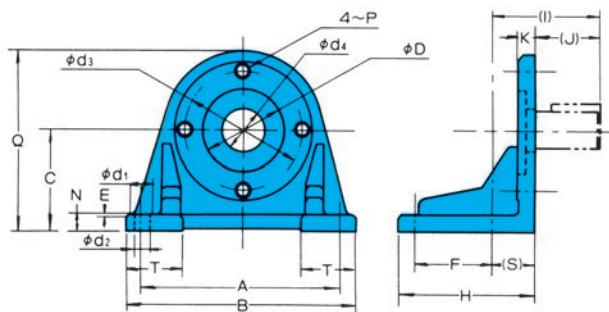


Kit Model No.	Applicable Pump Model No.	Accessories				Dimensions					
		Bolt	Q'ty	Washer	Q'ty	A	B	C	E	F	
IHM-2-10	PVS-0B PVS-1B	TB-10x30	2	WP-10	2	127	152.5	69.8	1	50.8	
IHM-4-10	PVS-2B	TB-12x30	2	WP-12	2	220.7	246	107.95	1	114.3	

Kit Model No.	Dimensions											Weight kg		
	H	(I)	(J)	K	N	P	Q	(S)	T	ϕD	ϕd_1	ϕd_2	ϕd_3	ϕd_4
IHM-2-10	96	64.5	32	17.5	13	M10	135	32.5	36.5	82.6	22	11	106.4	50
IHM-4-10	140	56.7	44	16	16	M12	195.5	12.7	53	101.6	22	11	146	40

When only the mounting feet are required, the pump mounting bolts, washers and other parts are sold together as the Foot Mounting Kit.

Coupling kit

Kit for PVS-0B: PSCF-100000

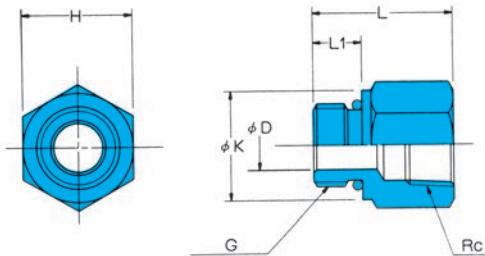


Applicable Pump Model No.	PVS-0B-8	
Plunger Kit model No.	Suction port	Discharge port
L	46	40
L ₁	16	14
ϕK	$\phi 36$	$\phi 27$
ϕD	$\phi 16$	$\phi 12$
H	36	27
G screw size	G 3/4	G 1/2
Rc screw size	Rc 3/4	Rc 1/2
O-ring size	1B-P24	1B-P18

Notes) 1. Joints are on sale in the Joint Kit which includes O-rings.
2. The dimensions of the O-ring seal section on the connector conforms with JIS B2351.
3. O-ring 1B/B-** refers to JIS B2401-1B.

Piping Flange Kit

For PVS-1B, 2B

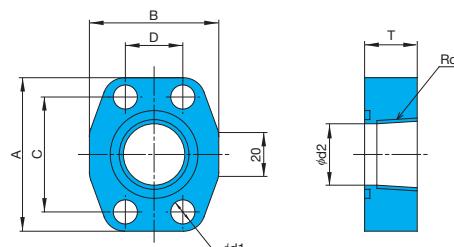


Plunger Kit model No.	PVS-1B-16, 22		PVS-2B-35, 45	
	PSF-101000		PSF-102000	
	Suction port	Discharge port	Suction port	Discharge port
A	70	65	79	70
B	59	52	73	59
C	52.4	47.5	58.7	52.4
D	26.2	22.0	30.2	26.2
T	24	24	28	24
ϕd_1	$\phi 11$	$\phi 11$	$\phi 11$	$\phi 11$
ϕd_2	$\phi 28$	$\phi 22$	$\phi 37$	$\phi 28$
X	1	3/4	1-1/4	1
Mounting bolt	TH-10x40	TH-10x40	TH-10x45	TH-10x40
Washer	WS-B-10	WS-B-10	WS-B-10	WS-B-10
O-ring	NBR-90 G35	NBR-90 G30	NBR-90 G45	NBR-90 G35
Weight kga	0.6	0.5	0.75	0.6

Notes) 1. The piping flange is on sale in the Flange Kit which includes mounting bolts, washers and O-rings.
2. The materials and hardness of the O-ring conform with JIS B2401.
3. For details on tightening torque, see page C-11.




Uni-pump Specifications

(CE mark standard compliant)

Explanation of model No.

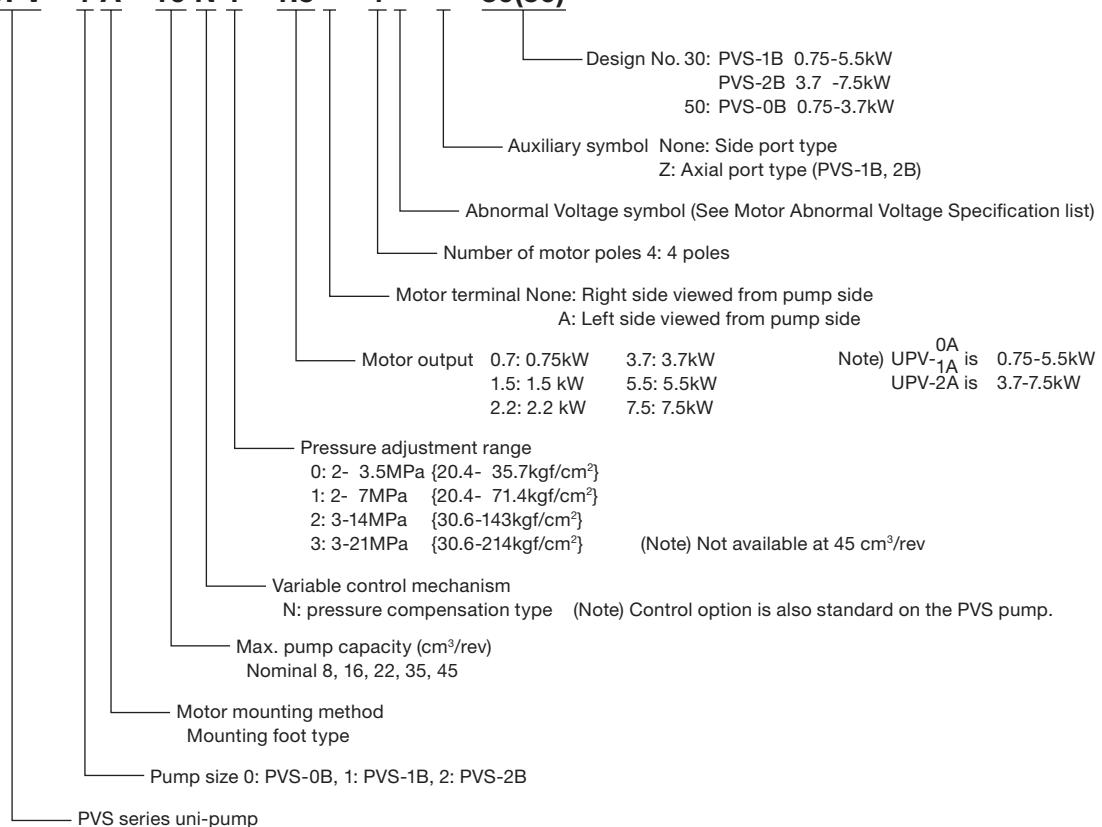UPV - 1 A - 16 N 1 - 1.5 * - 4 * - * - 30(50)

Motor selection curves

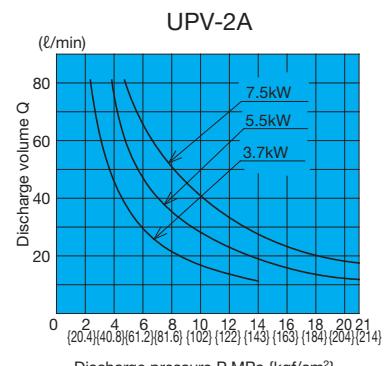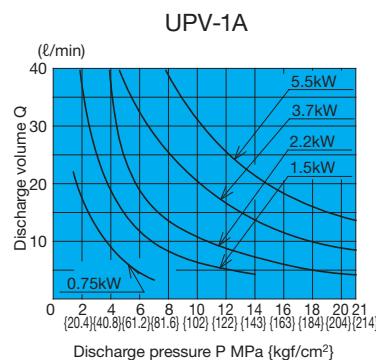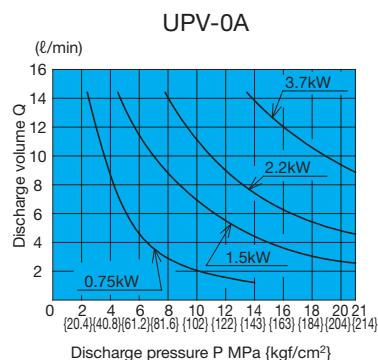

• How to select the motor

The lower side of the output curves for each of the motors shown above indicates the operating range under rated output for that motor.

* Select a uni-pump that has a pressure and flow rate that is within the range of the drive so that the drive will not overload.

* When the startup current of the uni-pump becomes higher for the IE1 motor, breakers may need to be changed.


Motor Abnormal Voltage Specification list

Abnormal Voltage symbol	Voltage - Frequency
None	AC 200V-50/60Hz, AC 220V-60Hz
D	AC 380V - 50Hz
E	AC 415V - 50Hz
F	AC 440V - 60Hz
G	AC 460V - 60Hz
H	AC 480V - 60Hz
L	AC 220V - 50Hz


Abnormal Voltage symbol	Voltage - Frequency
M	AC 230V - 60Hz
N	AC 230V - 50Hz
R	AC 400V - 50Hz
S	AC 440V - 50Hz
U	AC 380V - 60Hz
V	AC 400V - 60Hz
W	AC 420V - 50Hz

Installation Dimension Drawings


UPV-0A-8**-**-4-50
(side port type)

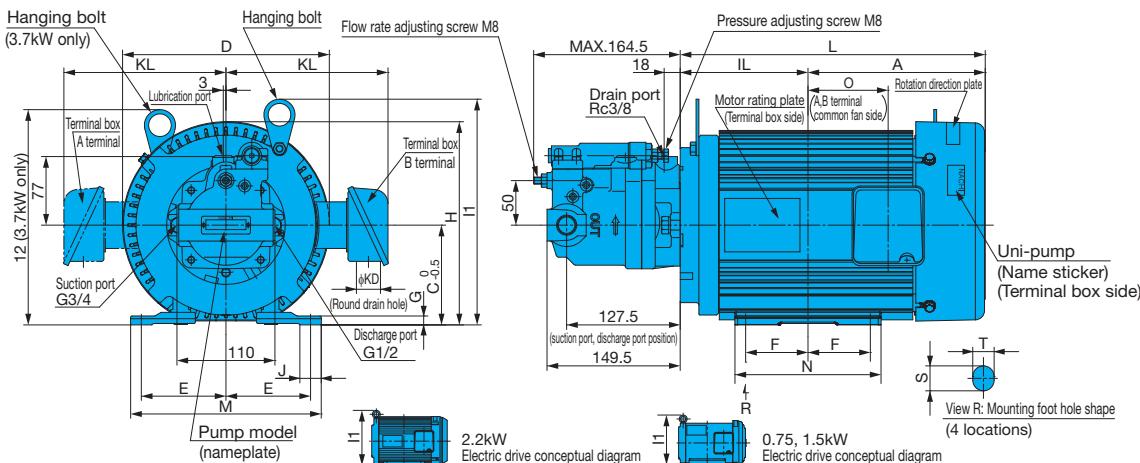

UPV-1A-16**-**-4-30
22
(side port type)

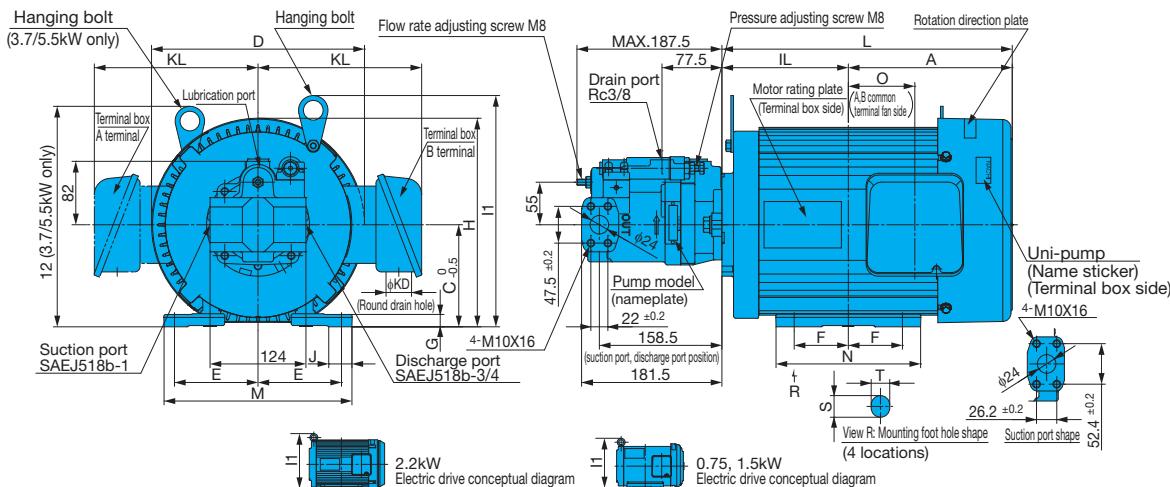

UPV-2A-35**-**-4-30
45
(side port type)

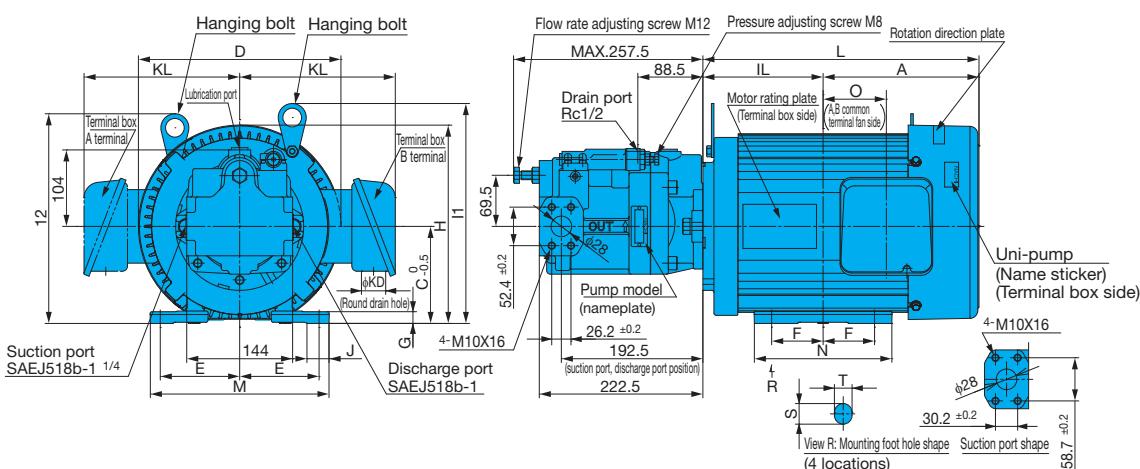

1. Drive motor is fully enclosed fan cooled, 0.75 to 3.7 kW is E type, and 5.5 to 7.5 kW is B type.
2. Standard voltage for drive motor is 200 VAC, 50/60 Hz or 220 VAC, 60 Hz.
3. Viewed from the pump side, suction port is on the left and discharge port is on the right.
4. Broken lines indicate instances for the A terminal. Broken lines pass through to the other side of the pump along its center.
5. See page (A-21) for the dimension table and characteristics of drive motor.

Motor Specifications

Output kW	Motor Dimensions [mm]																		Frame No.	Weight [kg]
	A	IL	C	D	E	F	G	H	I1	I2	J	L	M	N	SxT	φKD	KL	O		
0.75	137	107.5	80	152	62.5	50	4.5	160	193	—	47.5	244.5	165	130	25x10	27	137	65	80M	19
1.5	160.5	118.5	90	183	70	62.5	4.4	183	204	—	22	279	165	152.5	16x10	27	142	68	90L	22
2.2	179	133	100	206	80	70	7	203	226	—	39	312	206	170	14x12	27	153	83	100L	36
3.7	199	143.5	112	233	95	70	10	228	253	242	24	342.5	214	164	14x12	27	182	90	112M	40
5.5	212	163.5	132	275	108	70	16	270	299	285	30	375.5	243	187	14x12	33	212	86	132S	52
7.5	231	182.5	132	275	108	89	16	269	299	285	30	413.5	243	226	14x12	33	212	105	132M	60

Characteristics of drive motor for unipump (domestic standard 3 rating)

Output kW	Poles	(Note ¹): Model Number TYPE (N)	Voltage [V]	Frequency [Hz]	Current rating [A]	RPM rating [min ⁻¹]	Heat resistance
0.4	4	VBEA- (VDS series only)	200	50	2.20	1420	E
			200	60	1.90	1710	
			220	60	1.91	1720	
0.75	4	V*EA-*A4*07	200	50	3.5	1430	F
			200	60	3.2	1720	
			220	60	3.1	1730	
1.5	4	V*EA-*A4*15	200	50	6.9	1450	F
			200	60	6.2	1740	
			220	60	6.0	1750	
2.2	4	V*EA-*A4*22	200	50	9.5	1460	F
			200	60	8.8	1750	
			220	60	8.5	1760	
3.7	4	V*EA-*A4*37	200	50	15.4	1460	F
			200	60	14.3	1760	
			220	60	13.5	1760	
5.5	4	V*EA-*A4*55	200	50	23.0	1470	F
			200	60	21.0	1760	
			220	60	19.9	1770	
7.5	4	V*EA-*A4*75	200	50	30.0	1460	F
			200	60	27.0	1760	
			220	60	26.0	1770	

1. The asterisks * indicate variations in the hydraulic pump series, size, and position of terminal box. Check the ratings sticker on the side of the drive motor (terminal box side).

2. Contact us for variations in voltage.

3. The allowable fluctuating range of the voltage value is ±5%.

4. Paint Color: Nachi standard color Mancel No. 5B6/3



Our international sales network covers every jurisdiction. Our global shipping partners mean you can be sure we're on hand whenever you need us.

Zeus Hydratech Ltd

Unit 35
Old Mills Industrial Estate
Paulton
Bristol, BS39 7SU
United Kingdom

T. +44 (0) 1172 130042
E: info@zeushydratech.com
W. www.zeushydratech.com